



Elemento de suspensión de goma

DK-A

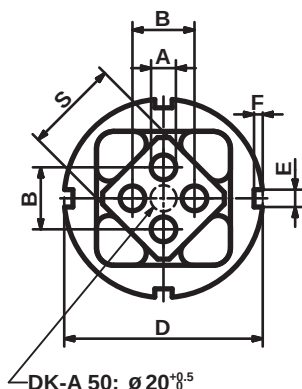

N.º de pieza	Tipo	øA	B	øD	E	F	□S	L	L1	Peso [kg]
01 071 001	DK-A 15 × 25	5 ^{+0.5} ₀	10 ±0.2	36 ^{+0.5} _{-0.1}	5	2.5	15	25	30 ⁰ _{-0.3}	0.05
01 071 002	DK-A 15 × 40	5 ^{+0.5} ₀	10 ±0.2	36 ^{+0.5} _{-0.1}	5	2.5	15	40	45 ⁰ _{-0.3}	0.08
01 071 003	DK-A 15 × 60	5 ^{+0.5} ₀	10 ±0.2	36 ^{+0.5} _{-0.1}	5	2.5	15	60	65 ⁰ _{-0.3}	0.12
01 071 004	DK-A 18 × 30	6 ^{+0.5} ₀	12 ±0.3	45 ^{+0.6} _{-0.1}	5	2.5	18	30	35 ⁰ _{-0.3}	0.10
01 071 005	DK-A 18 × 50	6 ^{+0.5} ₀	12 ±0.3	45 ^{+0.6} _{-0.1}	5	2.5	18	50	55 ⁰ _{-0.3}	0.16
01 071 006	DK-A 18 × 80	6 ^{+0.5} ₀	12 ±0.3	45 ^{+0.6} _{-0.1}	5	2.5	18	80	85 ⁰ _{-0.3}	0.25
01 071 007	DK-A 27 × 40	8 ^{+0.5} ₀	20 ±0.4	62 ^{+0.7} _{-0.1}	6	3	27	40	45 ⁰ _{-0.3}	0.25
01 071 008	DK-A 27 × 60	8 ^{+0.5} ₀	20 ±0.4	62 ^{+0.7} _{-0.1}	6	3	27	60	65 ⁰ _{-0.3}	0.37
01 071 009	DK-A 27 × 100	8 ^{+0.5} ₀	20 ±0.4	62 ^{+0.7} _{-0.1}	6	3	27	100	105 ⁰ _{-0.3}	0.61
01 071 010	DK-A 38 × 60	10 ^{+0.5} ₀	25 ±0.4	80 ^{+0.8} _{-0.1}	7	3.5	38	60	70 ⁰ _{-0.3}	0.62
01 071 011	DK-A 38 × 80	10 ^{+0.5} ₀	25 ±0.4	80 ^{+0.8} _{-0.1}	7	3.5	38	80	90 ⁰ _{-0.3}	0.82
01 071 012	DK-A 38 × 120	10 ^{+0.5} ₀	25 ±0.4	80 ^{+0.8} _{-0.1}	7	3.5	38	120	130 ⁰ _{-0.3}	1.22
01 071 013	DK-A 45 × 80	12 ^{+0.5} ₀	35 ±0.5	95 ^{+1.0} _{-0.1}	8	4	45	80	90 ⁰ _{-0.3}	1.14
01 071 014	DK-A 45 × 100	12 ^{+0.5} ₀	35 ±0.5	95 ^{+1.0} _{-0.1}	8	4	45	100	110 ⁰ _{-0.3}	1.41
01 071 015	DK-A 45 × 150	12 ^{+0.5} ₀	35 ±0.5	95 ^{+1.0} _{-0.1}	8	4	45	150	160 ⁰ _{-0.3}	2.11
01 071 016	DK-A 50 × 120	M12 × 40	40 ±0.5	108 ^{+1.2} _{-0.1}	8	4	50	120	130 ⁰ _{-0.3}	2.26
01 071 017	DK-A 50 × 200	M12 × 40	40 ±0.5	108 ^{+1.2} _{-0.1}	8	4	50	200	210 ⁰ _{-0.3}	3.74
01 071 018	DK-A 50 × 300	M12 × 40	40 ±0.5	108 ^{+1.2} _{-0.1}	8	4	50	300	310 ⁰ _{-0.3}	5.62

Lista de pares y cargas en la página 2.3.

Si no se especifican otras unidades, los números indicados están en mm.