


Dispositivo tensor



Juego de jinetes de la cadena P



Simplex «S»

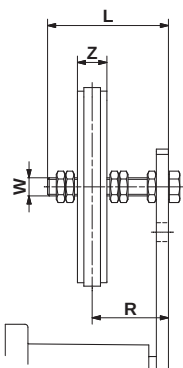

Dúplex «D»

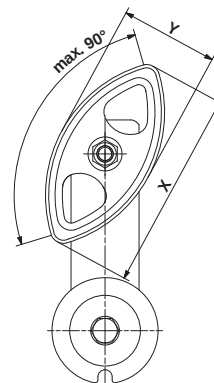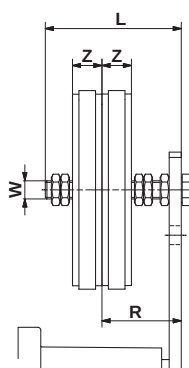

N.º de pieza	Tipo	Cadena de rodillos		W	L	X	Y	Z	Par de apriete hexagonal tuerca 0,5 d [Nm]	adecuado para tamaño SE	Ajuste de la gama R con SE	Peso [kg]
		ANSI	DIN 8187									
Simplex «S»												
06 550 001	P $\frac{3}{8}$ " – 8 S	35	ISO 06 B-1	M8	45	74	37	10.2	11	11	19–34	0.05
06 550 002	P $\frac{1}{2}$ " – 10 S	40	ISO 08 B-1	M10	55	96	48	13.9	20	15/18	23–41	0.10
06 550 003	P $\frac{5}{8}$ " – 10 S	50	ISO 10 B-1	M10	55	126	63	16.6	20	18	24–39	0.12
06 550 004	P $\frac{3}{4}$ " – 12 S	60	ISO 12 B-1	M12	80	148	72	19.5	35	27	30–61	0.18
Dúplex «D»												
06 560 001	P $\frac{3}{8}$ " – 8 D	35	ISO 06 B-2	M8	45	74	37	10.2	11	11	25–30	0.07
06 560 002	P $\frac{1}{2}$ " – 10 D	40	ISO 08 B-2	M10	55	96	48	13.9	20	15/18	30–34	0.12
06 560 003	P $\frac{5}{8}$ " – 10 D	50	ISO 10 B-2	M10	70	126	63	16.6	20	18	34–46	0.17
06 560 004	P $\frac{3}{4}$ " – 12 D	60	ISO 12 B-2	M12	80	148	72	19.5	35	27	40–52	0.26

Para uso de doble cara. Velocidad máxima permitida de la cadena 1,5 m/s.

Material: POM-H.

Temperatura de trabajo: De –40° a +100 °C.

Si no se especifican otras unidades, los números indicados están en mm.